PREDICTED ENERGY ASSESSMENT




Plot 388, 2 Bed, Dwelling type: Flat, Detached K, B Date of assessment: 20/12/2022

Produced by: Silvio Junges
Total floor area: 68.51 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

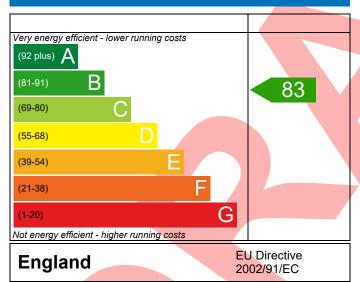

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

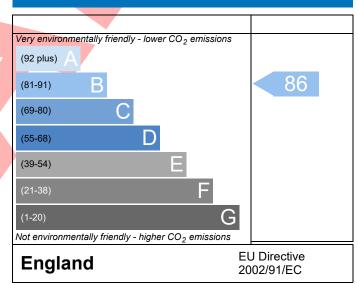

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-P637-6821-388				ssued on Date	20/12/2022		
Assessment Reference	Plot 388 Prop Type Ref GFF-As-Det							
Property	Plot 388, 2 Bed, K, B							
SAP Rating		83 B	DER	19.08	TER	19.41		
Environmental		86 B	% DER <ter< td=""><td></td><td>1.70</td><td></td></ter<>		1.70			
CO ₂ Emissions (t/year)		1.07	DFEE	49.61	TFEE	52.62		
General Requirements Compliance		Pass	% DFEE <tfee< td=""><td></td><td>5.72</td><td></td></tfee<>		5.72			
	Mr. Silvio Junges, Silvio Junges, Tel: 01884 242050, silvio.junges@aessc.co.uk							
Client	.,. 0							
SUMARY FOR INPUT D	ATA FOR New Build (As I	Designed)						
Criterion 1 – Achieving	the TER and TFEE rate							
1a TER and DER								
Fuel for main heatir	ng	Mains ga	as					
Fuel factor								
Target Carbon Dioxi	19.41	19.41 kgCO ₂ /m ²						
Dwelling Carbon Did	19.08	19.08 kgCO ₂ /m ²						
	-0.33 (-1	-0.33 (-1.7%) kgCO ₂ /m ²						
1b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)		52.62			kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFEE)		49.61						
		-3.0 (-5.7	7%)		kWh/m²/yr	Pass		
Criterion 2 – Limits on			_					
Limiting Fabric Stan	ndards							
2 Fabric U-values								
Element		rerage		ighest				
External wall		25 (max. 0.30)	0.	.26 (max. 0.70)		Pass		
Party wall		00 (max. 0.20)	-			Pass		
	Floor 0.18 (.18 (max. 0.70)		Pass Pass		
Openings	10 (max. 2.00)	max. 2.00) 1.40 (max. 3.30)						
2a Thermal bridging								
	g calculated from linear t	nermal transmit	tances for each jur	nction				
3 Air permeability	1.50				2.111			
Air permeability at 50 pascals			sign value)		n ³ /(h.m ²) @ 50 Pa n ³ /(h.m ²) @ 50 Pa			
Maximum	10.0	10.0			Pass			
Limiting System Effi								
4 Heating efficiency								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30			
	Combi boiler			
	Efficiency: 89.6% SEDBUK2009			
	Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Continuous extract system (decentralised)				
Specific fan power	0.1700 0.1800			
Maximum	0.7	Pass		
Criterion 3 – Limiting the effects of heat gains in sun	nmer			
9 Summertime temperature				
Overheating risk (Thames Valley)	Medium	Pass		
Based on:				
Overshading	Average			
Windows facing North East	5.05 m ² , No overhang			
Windows facing South West	5.05 m ² , No overhang			
Air change rate	4.00 ach			
Blinds/curtains	None			
Criterion 4 – Building performance consistent with D	DER and DFEE rate			
Party Walls				
Туре	U-value			
	W/m²K	Pass		
Air permeability and pressure testing				
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass		
10 Key features				
Party wall U-value	0.00 W/m ² K			
Door U-value	1.10 W/m²K			
Window U-value	0.90 W/m²K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 83	B 86	

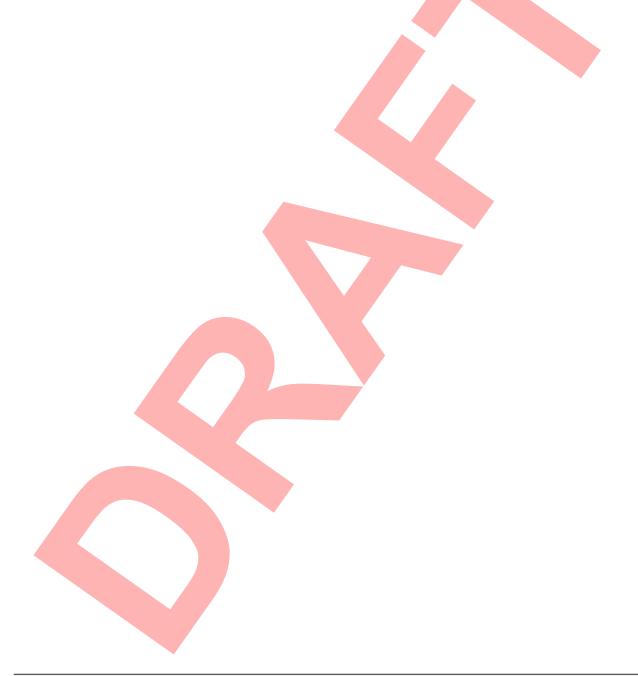

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19