PREDICTED ENERGY ASSESSMENT




Plot 391, 2 Bed, Dwelling type: Flat, Detached K, B Date of assessment: 20/12/2022

Produced by: Silvio Junges
Total floor area: 68.51 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

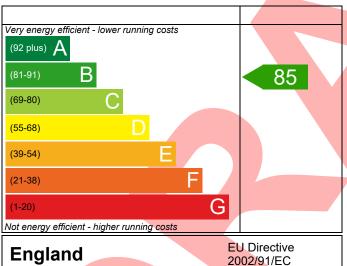

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

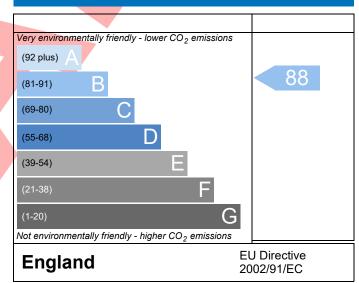

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-P637-6821	-391				Issued on Date	20/12/2022			
Assessment Plot 391									
Reference									
Property Plot 391, 2 Bed,	К, В								
SAP Rating		85 B	DER	16.13	TER	16.88			
Environmental		88 B	% DER <ter< td=""><td></td><td>4.42</td><td></td></ter<>		4.42				
CO ₂ Emissions (t/year)		0.90	DFEE	38.37	TFEE	40.24			
General Requirements Compliance		Pass	% DFEE <tfee< td=""><td></td><td>4.66</td><td></td></tfee<>		4.66				
Assessor Details Mr. Silvio Junges, Sil		Tel: 01884	242050,		Assessor ID	P637-0001			
silvio.junges@aessc	.co.uk								
Client									
SUMARY FOR INPUT DATA FOR New Buil		gned)							
Criterion 1 – Achieving the TER and TFEE	rate								
1a TER and DER									
Fuel for main heating		Mains ga							
Fuel factor	-	1.00 (mains gas)							
Target Carbon Dioxide Emission Rate (16.88 kgCO ₂ /m ²								
Dwelling Carbon Dioxide Emission Rat	e (DER)	16.13	40()		kgCO ₂ /m ²	Pass			
1b TFEE and DFEE		-0.75 (-4	.4%)		kgCO₂/m²				
Target Fabric Energy Efficiency (TFEE)		40.24			kWh/m²/yr				
Dwelling Fabric Energy Efficiency (DFE	38.37 kWh/m²/yr								
, (_/	-1.8 (-4.	5%)		kWh/m²/yr	Pass			
Criterion 2 – Limits on design flexibility									
Limiting Fabric Standards									
2 Fabric U-values									
Element	Averag	e		Highest					
External wall		nax. 0.30)		0.26 (max. 0.7	·(O)	Pass			
Party wall	0.00 (m	nax. 0.20)		-		Pass			
Openings	1.40 (m	(max. 2.00) 1.40 (max. 3.30)							
2a Thermal bridging									
Thermal bridging calculated from I	inear thern	nal transmit	tances for each j	unction					
3 Air permeability									
Air permeability at 50 pascals		5.01 (de	sign value)		m³/(h.m²) @ 50 Pa	Э			
Maximum		10.0			m³/(h.m²) @ 50 Pa	Pass			
Limiting System Efficiencies									
4 Heating efficiency									

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30	Pass			
	Combi boiler				
	Efficiency: 89.6% SEDBUK2009				
	Minimum: 88.0%				
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	No cylinder				
<u>6 Controls</u>					
Space heating controls	Programmer, room thermostat and TRVs	Pass			
Hot water controls	No cylinder				
Boiler interlock	Yes	Pass			
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Continuous extract system (decentralised)					
Specific fan power	0.1700 0.1800				
Maximum	0.7	Pass			
Criterion 3 – Limiting the effects of heat gains in sum	nmer				
9 Summertime temperature					
Overheating risk (Thames Valley)	Slight	Pass			
Based on:					
Overshading	Average				
Windows facing North East	5.05 m², No overhang				
Windows facing South West	6.40 m², No overhang				
Air change rate	6.00 ach				
Blinds/curtains	None				
Criterion 4 – Building performance consistent with D	PER and DFEE rate				
Party Walls					
Туре	U-value				
	W/m²K	Pass			
Air permeability and pressure testing					
3 Air permeability					
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa				
Maximum	10.0 m³/(h.m²) @ 50 Pa				
10 Key features					
Party wall U-value	0.00 W/m²K				
Door U-value	1.10 W/m²K				
Window U-value	0.90 W/m²K				
· · · · · · · · · · · · · · · · · · ·					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 85	B 88	

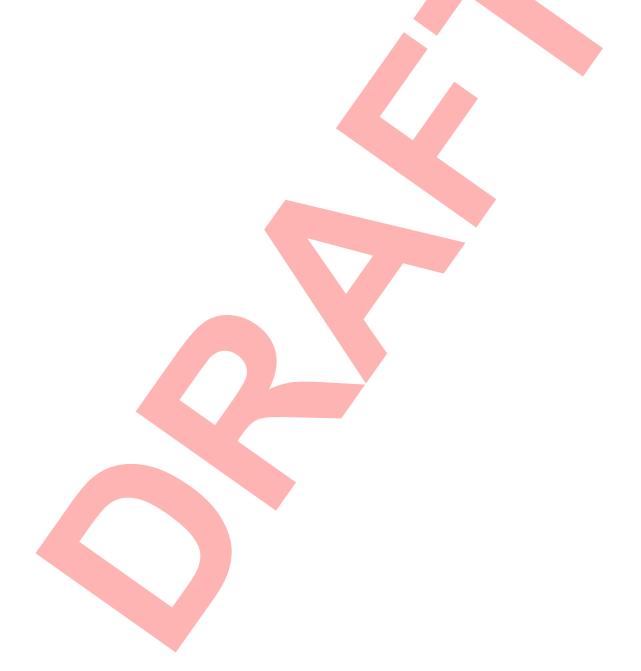

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

